




# OLLARI&CONTI

MOD. 24B 48B/B1 100A 130A 200C 300C 500C 500C1  
(conformità alla direttiva 97/23 CE P.E.D.)

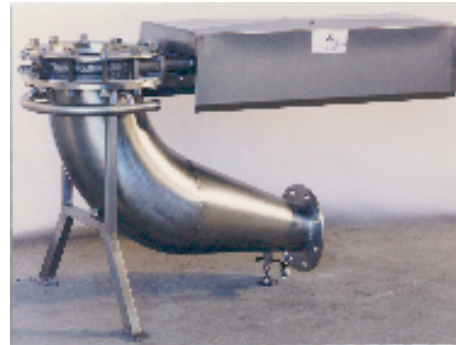


### PNEUMATIC CONVEYORS

The pneumatic conveyors are employed to transport solid and liquid products inside chemical and food industries and along the slaughtering lines by means of piping. A pneumatic conveying system offers many advantages:

- Possibility of crossing any kind of plant
- Speedy transportation
- Extremely reduced transport costs
- Low maintenance costs
- Construction in compliance with the latest hygienic and sanitary rules in force
- Construction in compliance with the directive 97/23 CE (P.E.D.)

The pneumatic conveyors are completely built in AISI 304 stainless steel.

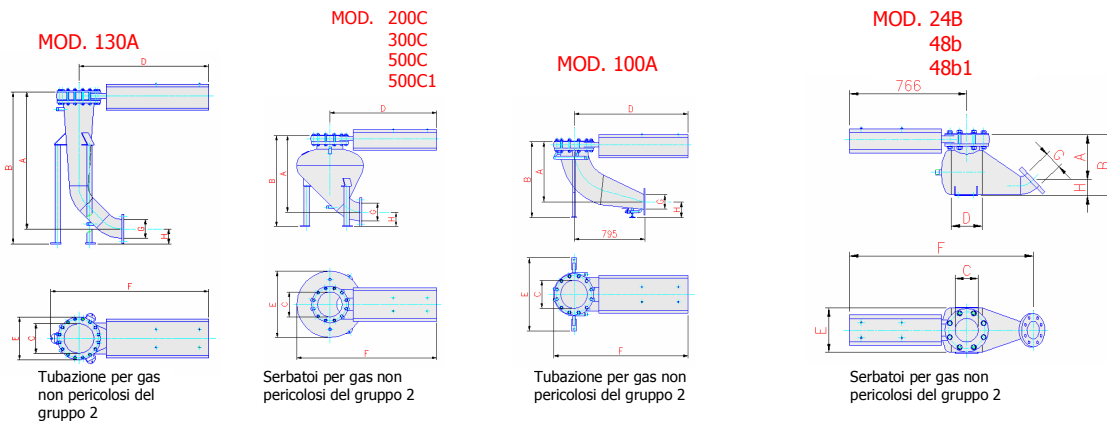

Technical features											Conformità P.E.D. modulo
MODELLO	A mm	B mm	C DN...PN10	D mm	E mm	F mm	G DN...PN10	H mm	PS max bar	Categoria	
100A	640	810	300	1280	780	1510	150	170	6	I	A
130A	1780	1635	350	1520	505	1850	200	174	6	I	A
24B	290	400	150	200	290	1200	100	110	5	I	A
48B	290	400	150	480	290	1509	100	110	5	I	A
48B1	240	400	150	450	290	1475	150	160	5	I	A
200C	920	1094	300	1280	800	1680	200	174	5	II	A1
300C	1304	1478	300	1280	912	1736	200	174	6	III	B+C1
500C	1330	1504	300	1520	912	1976	200	174	6	III	B+C1
500C1	1330	1504	350	1520	912	1976	200	174	6	III	B+C1

Subject to change without notice.

Via Sonnino 18/a • 43100 Parma (Italy)  
 Tel. +39 0521/992228 • Fax +39 0521/994249  
<http://www.ollarieconti.it> • e-mail: [info@ollarieconti.it](mailto:info@ollarieconti.it)